

A-type (**) layer equipment



Clever design of cage mesh

mfortable feeding environment

Make more profits

Low price and best quality

Saving chicken feed

Apply to different chicken house

Reduce egg broken rate



Jl. Daan Mogot KM. 21, Pergudangan Arcadia Nlok G15/12, Batu Ceper, Tangerang 151222 - Indonesia

Wa: +62 852-8269-8558 / +62 859-2152-6722

Tel: +62 21-29006273 / +62 21-29006283

+62 21-29006292

Fax: +62 21-29006279

Email: ptsinarmustikaraya@gmail.com

f simuraya.ternak

simuraya.ternak

→ simuraya.ternak

www.sinarmustikaraya.com




A-TYPE LAYER EQUIPMENT

TECHNICAL NOTE

- Corrosion-resistant materials for breeding
- ◆ The cage mesh is made of zinc-aluminum alloy steel wire medium frequency DC welding process, and the corrosion resistance of the products made by this material and process is 5-10 times that of ordinary galvanized steel wire.

 Zinc-aluminum alloy steel wire has superb corrosion resistance, self-repairing ability and ductility and deformation ability, tensile strength in 700-900MPA.

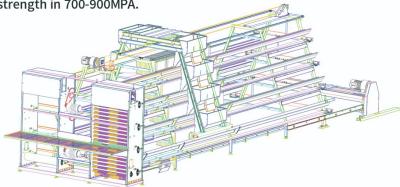

- The mesh weld joints welded by the medium frequency DC welding process are smooth and burr-free. It will not damage chickens and eggs.
- ◆ The frame legs and sheet metal parts are made of 275g high zinc plate by cold rolling process, this material and process is often used in the construction of ships, automobiles and skyscrapers. High corrosion resistance, high rigidity and extreme stability. The service life is more than 20 years.
- ◆ The slope of the bottom net is 8° golden slope, which is the best slope for the egg to roll. The bottom net with this slope has a 0% egg breaking rate.

| A type layer chicken cage size | | | |
|--------------------------------|----------|----------|----------|
| Cage parameters | 1960*460 | 1960*380 | 1500*500 |
| Cage length/mm | 1960 | 1960 | 1500 |
| Cage depth/mm | 460 | 380 | 500 |
| Cage height/mm | 410 | 410 | 440 |
| Area per bird(cm²/bird) | 450.8 | 496.53 | 500 |
| Cells cage | 5 | 5 | 3 |
| Birds number of cell cage | 4 | 3 | 5 |

- The bottom net is equipped with a number of stiffeners, which ensures that the bottom net is firm and at the same time, the bottom net will produce a trampoline effect, bring a comfortable foot feeling to the chickens, and significantly improve the efficiency of egg production.
- The feed reflux device is designed at both ends of the trough, which can return the residual material from the edge to the trough and save feed.
- Large size PVC feed trough to ensure chicken nutrition. Keeps every chicken can eat well.
 Equipped with a fully automatic egg picking device to reduce contact with eggs and minimize the egg breaking rate.







OUR ADVANTAGES



Fully automatic cage system

Automatic crane feeding system automatic egg collection system automatic manure cleaning system automatic environmental control system



Convenient operation

The investment is lower than that of H-type cage equipment, which is simple to operate and easy to use.



Strong applicability

It is suitable for different forms of chicken houses, closed chicken houses, semi-open chicken houses, fully open chicken houses, etc.



Higher profits

Ultra-low power consumption, ultra-low egg breaking rate, ultra-low labor cost, higher breeding income.